

Outlet Plate


TK Plate

- Used to take out the P/T ports from the pump when a valve stand is used separately.
- Those with "TK" marked for the pump type in the specification table on the right include the following plate.

Specification

Type	Hydraulic designation	Compatible pump	Connection diameter (Rc)	Approximate weight (kg)
TK-3		MP-5, 6, 12 12H, 15H, 17H	3/8	2.0
TK-4		MP-15	1/2 (Note 1)	2.0
TK-10		MP-10	3/8	2.2

(Note 1) The P/T ports on the top surface of TK-4 are Rc3/8.

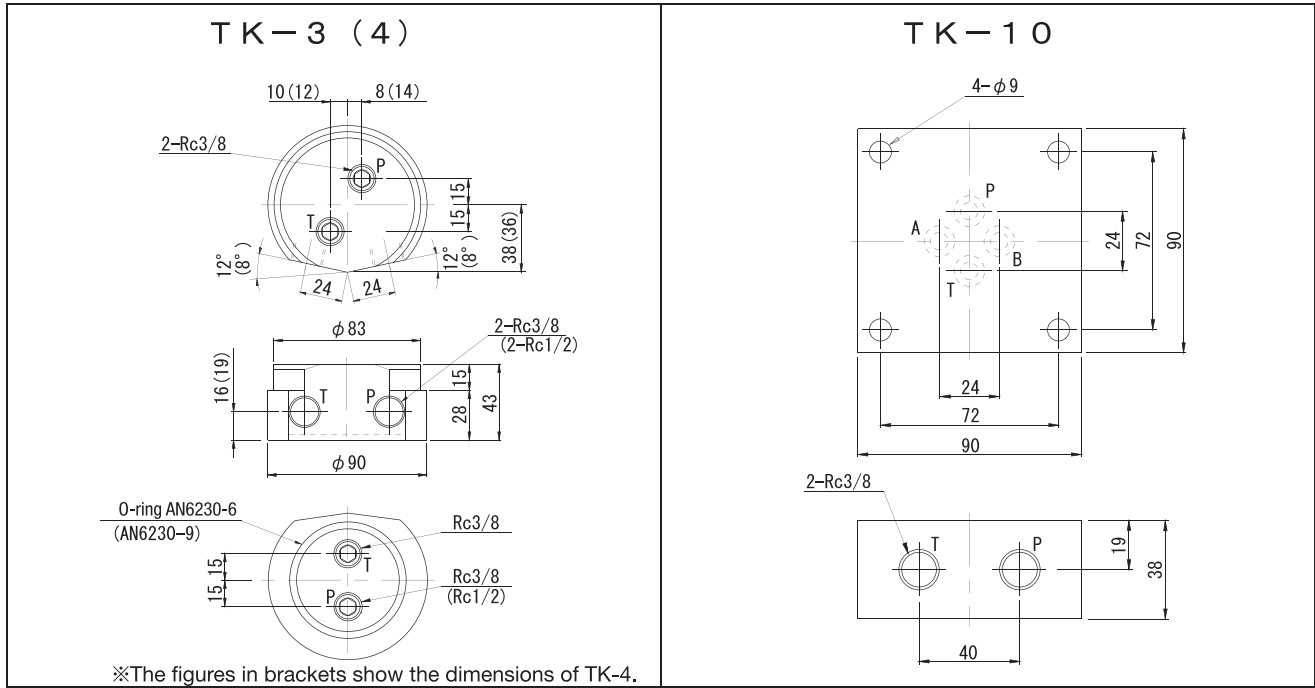

Hydraulic Valves

Pressure Control Valve

Relief Valve

- Characterized by small pressure fluctuation.
- When the pressure is adjusted, the lock nut should be loosened to rotate the handle clockwise slowly when increasing the pressure and counterclockwise when reducing the pressure. The lock nut must be tightened after adjusting the pressure.

Specification

Type	Hydraulic designation	Maximum operating pressure (MPa)	Maximum flow (L/min)	Pressure control range (MPa)	Allowable back pressure (MPa)	Connection diameter (Rc)	Approximate weight (kg)
RV-13		70	5	10~70	1	3/8	1.6
RV-14			10			1/2	

Characteristics of minimum adjusted pressure (with handle full open)

